

JUNIOR SERIES

SCISSOR LIFT

ELS LIFT

OUTPOWER THE GRAVITY.

EL5.5 JUNIOR SP



ADVANTAGES

- The lightest machine in low-level access series with 660 kg weight
- Rigid structured and unique design
- Easy parts replacement
- Safe driving at full height
- High maneuverability
- CAN communication protocol
- CE-EN280 certificate

STANDART FEATURES

- Proportional control
- Self-lock gate on platform
- Electromagnetic brake system
- Emergency stop button
- Cylinder holding valve
- Non-marking tyre
- Automatic pothole protection
- Onboard diagnostic system (ground and platform)
- Emergency lowering system
- Platform extension
- Horn
- Lifting with forklift and crane
- Charger protection
- All motion alarm
- 2 WD electric DC motor
- Hydraulic steering system
- Maintenance bar
- Flashing beacon
- Integrated tilt sensor with alarm
- Pressure sensor
- 2 x 12 V 105 Ah battery
- Hourmeter



JUNIOR SERIES

SCISSOR LIFT

ELS LIFT

OUTPOWER THE GRAVITY.

EL5.5 JUNIOR SP

DIMENSIONS


	Max. Working Height	5.5 m
A	Max. Platform Height	3.5 m
B	Stowed Height (Platform)	0.79 m
C	Stowed Height (Guardrails)	1.89 m
D	Ground Clearance – With Pothole Guards Deployed	0.15 m
E	Ground Clearance – Center	0.07 m
F	Width	0.76 m
G	Wheelbase	1.04 m
H	Length	1.29 m
I	Length with Access Steps	1.43 m
J	Platform Length	1.32 m
K	Platform Width	0.76 m
L	Platform Extension	0.05 m

EL5.5 JUNIOR SP

TECHNICAL SPECIFICATIONS

Max. Load Capacity of Main Platform	250 kg
Max. Load Capacity of Extension	100 kg
Gradeability	25%
Ascent / Descent Time	17 / 17 sec
Wheel Dimension	Solid 10 x 4"
Hydraulic Tank	5 L
Electric Motor	24 V / 1 kW / 1.0
Battery	2 x 12 V 105 Ah
Battery Charger	24 V / 20 A
Total Weight	660 kg
Working Slope	2°- 3°

EL5.5 JUNIOR SP

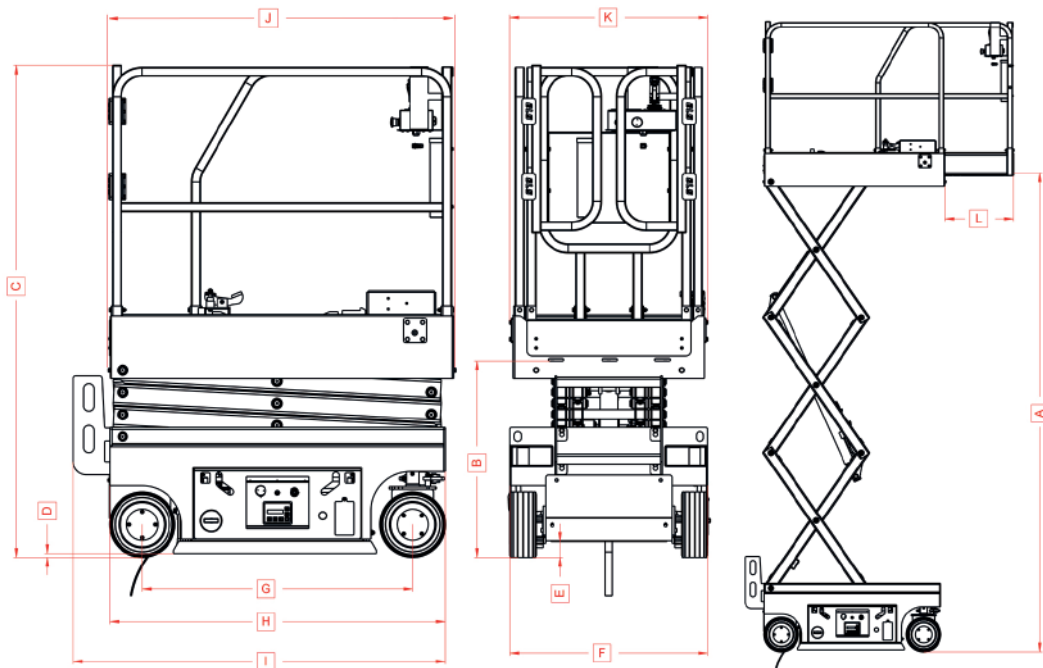

S3006P/S3008P/S3010P

MINI ÉLÉVATEURS MOBILES À CISEAUX



- Léger et compact
- Passe facilement à travers une porte simple
- Aucun stabilisateur nécessaire
- Conception robuste pour les conditions de chantier difficiles
- Avantages éprouvés par rapport à d'autres produits d'accès à faible hauteur

 **snorkel**[™]
www.snorkellifts.com

MINI ÉLÉVATEURS MOBILES À CISEAUX


S3006P S3008P/S3010P

DIMENSIONS	S3006P	S3008P	S3010P
Hauteur de travail	4,0 m	4,5 m	5,0 m
Hauteur max. sous plancher (A)	2,0 m	2,5 m	3,0 m
Tailles de nacelle (hors-tout)	1,1 m x 0,52 m	1,1 m x 0,52 m	1,1 m x 0,52 m
Capacité de charge max.	240 kg	240 kg	240 kg
Largeur (B)	0,75 m	0,75 m	0,75 m
Longueur hors-tout (C)	1,2 m	1,2 m	1,2 m
Hauteur garde corps (D)	1,7 m	1,8 m	1,8 m

PERFORMANCES			
Utilisation extérieure au vent	0 m/s	0 m/s	0 m/s
Temps d'élévation/descente	8/14 s	13/17 s	19/26 s

MOTORISATION	
Motorisation	12V DC batterie
Charger	Construit en multi-tension (90V - 240V)

POIDS			
Poids à vide	310 kg	350 kg	370 kg

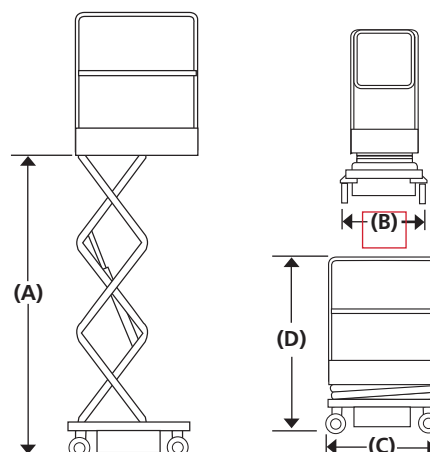


CARACTÉRISTIQUES DE SÉRIE

- Système de freinage automatique
- Capteur de dévers
- Portes d'accès de type saloon
- Chargeur de batterie intégré 90V-240V
- Indicateur de charge de la batterie
- Points pour chariot élévateur
- Abaissement d'urgence
- Pneus non marquants
- Plateaux de maintenance coulissant
- Garantie 2 ans pièces & main d'œuvre, 5 ans de garantie sur la structure
- Certification CE

OPTIONS

- Teintes spéciales
- Huile biodégradable
- Télématicue Snorkel OnSite

HAUTEUR DE PLANCHER MAXIMUM

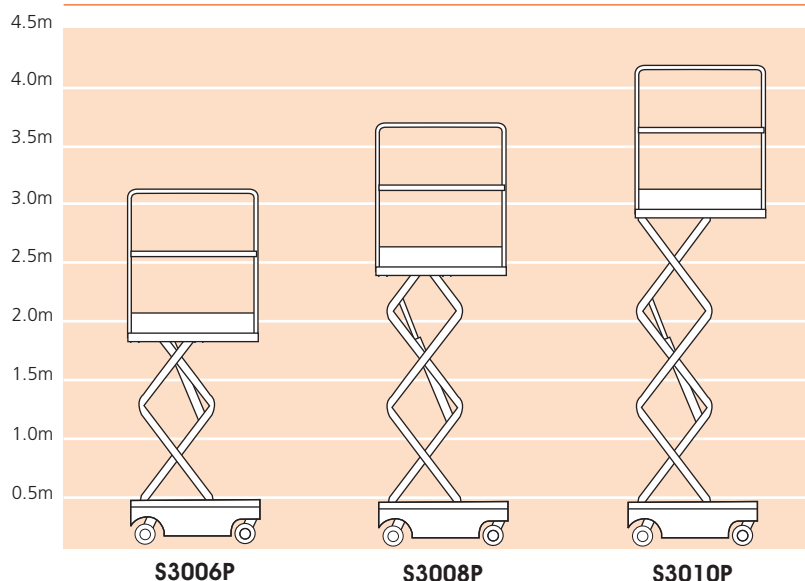

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales.emea@snorkellifts.com